

DIN 5462 SE

CODICE DI ORDINAZIONE / ORDERING CODE


201 PE XXX Z SE

DIN 5462 SE
 VERSIONE / VERSION
 CILINDRATA / DISPLACEMENT
 TIPO / TYPE
 POMPA A PISTONI / PISTON PUMP



2


BIDIREZIONALE
BI-ROTATIONAL



PE 40

PE 50

PE 60

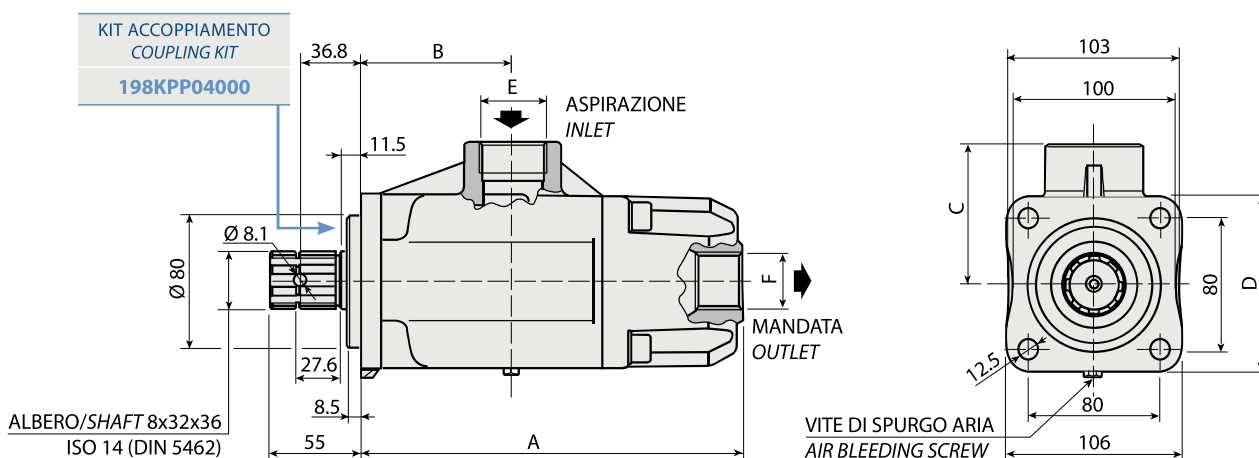

CARATTERISTICHE E DATI TECNICI / SPECIFICATIONS AND TECHNICAL DATA

TIPO TYPE	CODICE CODE	A mm	B mm	C mm	D mm	E ASPIRAZIONE INLET	F MANDATA OUTLET	PESO WEIGHT kg
PE 40	201PE040ZSE	232.5	945	85	106	1" 1/4 G	1" G	10.6
PE 50	201PE050ZSE							
PE 60	201PE060ZSE							

Per la scelta dei raccordi orientabili vedi pag. 214-215 / For the selection of adjustable fittings see page 214-215


- A richiesta possono essere fornite le pompe a pistoni con le guarnizioni HNBR per climi freddi (-40 °C).
- On request our piston pumps may be supplied with HNBR seals for cold climates (-40 °C).

DIN 5462 SE

TIPO / TYPE			PE 40	PE 50	PE 60
Cilindrata Displacement	Vg	cm ³ /h cm ³ /rev.	37	50	60
Pressione massima continua Max continuous operating pressure	P1	bar	330	330	290
Pressione massima intermittente Max intermittent operating pressure (max 30 s)	P2		360	360	340
Pressione massima di picco Max peak pressure (≤ 0.1 s)	P3		500	500	400
Velocità massima intermittente Max intermittent speed (P ≤ 20 bar)	n3	n/min r.p.m.	2400	2400	2100
Velocità massima continua Max continuous speed (≤ P1)	n1		1800	1800	1700
Velocità minima intermittente Min intermittent speed (≤ P2 x 0.5) (max 30 s)	n4		400	400	300

2

DIAGRAMMI / DIAGRAMS

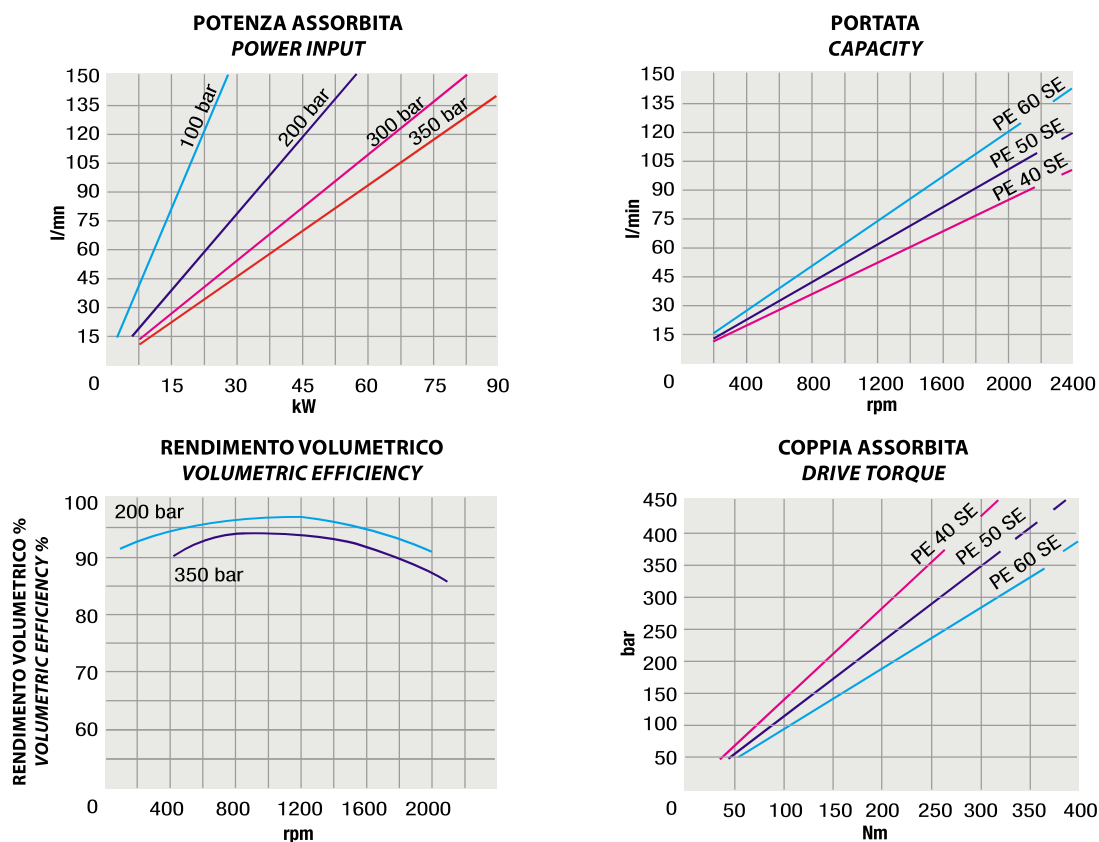

RILIEVI ESEGUITI CON OLIO ISO VG 46 A 50° C ($\nu = 30$ cSt)
THE ABOVE SPECIFICATIONS REFER TO OIL TYPE ISO VG 46 AT 50° C ($\nu = 30$ cSt)